

1 ft. x 2 ft.

DROP-IN CEILING SPEAKERS

**INSTALLS
FAST
& EASY!**

**Plenum-Rated
and Listed to
UL-1480***

Drop-In Ceiling Speaker CSD1X2 & Variations with Back Can

Bogen's CSD1X2 Drop-In Ceiling Speakers are 1' X 2' speakers that allow for fast and easy installation. Just make one simple cut to the ceiling tile, lay the support rail crossbar (included) across the ceiling grid, and drop the speaker into place.

- *Finely perforated grille over the entire front of speaker*
- *Fully enclosed, industrial grade steel construction*
- *Enclosed Back Can*
- *8" main cone with secondary high-frequency cone*
- *70V/25V, 4-watt transformer (4, 2, 1, 0.5, 0.25 watt) taps; selected by rotary switch*
- *Seismic attachment point*
- *Available in off-white and bright white ("U" versions) grille finish*
- *"VR" versions have a Recessed Volume Control (front-mounted)*
- *Listed to UL Standard 1480 for U.S. use*
- *Support Rail Crossbar (included)*




*Listed to UL Standard 1480 for U.S. use

BOGEN®

Drop-In Ceiling Speaker CSD1X2 & Variations (with Back Can)



| Lead | Color |
|------|--------|
| 70V | Red |
| 25V | Yellow |
| COM | Black |

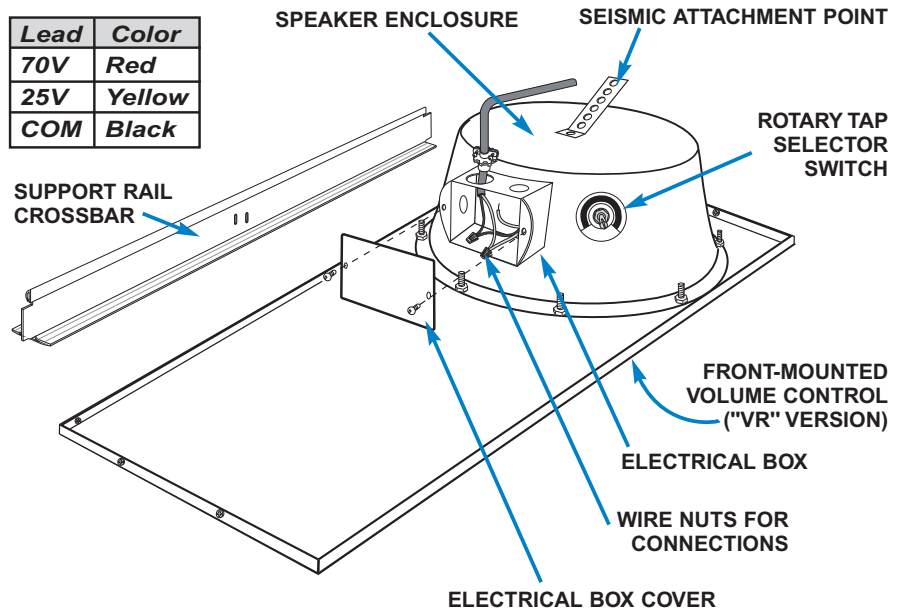

| Model | Off-white Finish | Bright White Finish (U) | Back Can | Recessed Volume Control (VR) |
|-----------|------------------|-------------------------|----------|------------------------------|
| CSD1X2 | ● | | ● | |
| CSD1X2U | | ● | ● | |
| CSD1X2VR | ● | | ● | ● |
| CSD1X2VRU | | ● | ● | ● |

SPECIFICATIONS

| | |
|--------------------------------|---|
| Frequency Response | 110 Hz to 20 kHz |
| SPL @ 1W/1m | 94 dB |
| Power Taps | 4, 2, 1, 0.5, 0.25 W |
| Dispersion @ 2 kHz (6 dB down) | 100° |
| Cone Material & Surround | Treated paper |
| Cones | 8" main cone with secondary high frequency cone |
| Magnet Weight | 10 oz. |
| Connection | Via wire nuts (included in electrical box) |
| Dimensions | 12-1/4" W x 5" H x 24" D |
| Product Weight | 10 lb. |

70V and 25V Compatible.

Plenum-Rated and Listed to UL Standard 1480 for U.S. only.

Architect and Engineer Specifications

The speaker shall be a Bogen Model CSD1X2. It shall be a 1 ft. x 2 ft. steel assembly with non-reflective, finished metal grille; damped high-compliance factory-mounted 8" loudspeaker with a treated paper cone; and 70V/25V transformer. The 8" main speaker cone shall have a 10 ounce magnet. A secondary high frequency cone speaker shall be included in the assembly. The back of the assembly shall have a back can enclosure. The speaker shall include a seismic attachment point. Output shall be 94 dB @ 1W/1m (min.). Frequency response shall be 110 Hz to 20 kHz (min.). Transformer shall have power taps of 4, 2, 1, 0.5, and 0.25 watts, selectable by rotary switch. A support rail crossbar shall be included. The speaker shall measure 12-1/4" W x 5" H x 24" D. The speaker shall weigh 10 lb. Speaker listed to UL Standard 1480 for U.S. use.

For CSD1X2: Front grille shall be off-white in color.

For CSD1X2U: Front grille finish shall be bright white in color.

For CSD1X2VR: Front grille finish shall be off-white in color. An easily accessible, front-mounted recessed volume control shall be included.

For CSD1X2VRU: Front grille finish shall be bright white in color. An easily accessible, front-mounted recessed volume control shall be included.

BOGEN[®]
COMMUNICATIONS, INC.

50 Spring Street, Ramsey, NJ 07446, U.S.A.
Tel: 201-934-8500 • Fax: 201-934-9832
www.bogen.com

Specifications subject to change without notice.
© 2007 Bogen Communications, Inc.
54-9261-01H 1208