


Fanvil V66 Prime Business Phone

Fanvil V66 Prime Business Phone integrates audio and video communication with smart features, providing superior communication for high-end business users. V66 features a 7-inch rotatable IPS touchscreen while built-in 2.4G & 5G Wi-Fi (Wi-Fi 6) and Bluetooth 5.4, providing users with an excellent interactive experience and comfortable instant communication services.

Highlights

- ✔ Antibacterial material of the handset and keypad surface effectively inhibits more than 99.5% of bacteria growth.
- ✔ 7" adjustable screen (0° to 40 °) for different lighting environments.
- ✔ Be able to receive video calls with video codec H.264
- ✔ Available to link with security products, can be easily customized into various security solutions for reducing investment
- ✔ Support audio codec G.722 and Opus, HD audio on speakerphone and handset
- ✔ Support 6-party local conference
- ✔ Built-in 2.4G/5G dual-band Wi-Fi 6 and Bluetooth BLE 5.4, realizing more flexible connectivity
- ✔ Two installation methods of desktop stand and wall mountable
- ✔ Up to 116(29*4) DSS keys, every DSS key can be set as Line/BLF/ Speed Dial Key).

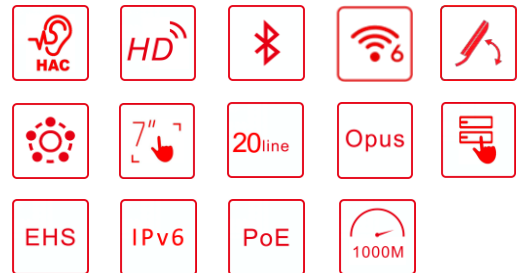

Generic

- 20 SIP lines
- HD voice
- Support receiving Video call
- Dual Gigabit ports, PoE enabled
- 7-inch (1024x600) color screen
- Handset / hands-free / headset mode
- Intelligent DSS keys (Virtual buttons)
- Desktop stand / wall-mounted (need an additional wall stand brack)
- Optional external power supply

Phone Features

- Local Phonebook (2000 entries)
- Remote Phonebook (XML/LDAP)
- Call logs (In/out/missed, 1000 entries)
- Blocked List/Allowed List
- Screen saver
- Voice Message Waiting Indication (VMWI)
- Programmable DSS/Soft keys
- Network Time Synchronization
- Built-in Bluetooth BLE 5.4: Support Bluetooth headset/ Pairing mobile devices

- Built-in 2.4G/5G dual-band Wi-Fi 6
- Support Plantronics wireless headset (Through Plantronics APD-80 EHS Cable)
- Support Jabra wireless headset (Through Fanvil EHS20 EHS Cable)
- Support Recording (through server)
- Action URL / Active URI
- uaCSTA
- SIP Hotspot
- Multicast
- Action Plan
- Group listening

Call Features

- Call out / Answer / Reject
- Mute / Unmute (Microphone)
- Call Hold / Resume
- Call Waiting
- Intercom
- Caller ID Display
- Speed Dial
- Anonymous Call (Hide Caller ID)
- Call Forwarding (Always/Busy/No Answer)
- Call Transfer (Attended/Unattended)

- Call Parking/Pick-up (Depending on server)
- Redial
- Do-Not-Disturb
- Auto-Answering
- Voice Message (With server)
- 6-way Conference
- Hot Line
- Hotdesking
- BLF
- IP direct dial

Audio

- HD Voice Microphone/Speaker (Handset/Hands-free, 0 ~ 7KHz Frequency Response)
- HAC handset
- Wideband ADC/DAC 16KHz Sampling
- Narrowband Codec: G.711a/u, G.723.1, G.726, G.729, G.729A, G.729B, G.729AB, iLBC
- Wideband Codec: G.722, Opus
- Full-duplex Acoustic Echo Cancellor (AEC)
- Voice Activity Detection (VAD) / Comfort Noise Generation (CNG) / Background Noise Estimation (BNE) / Noise Reduction (NR) / Automatic Gain Control (AGC)
- Packet Loss Concealment (PLC)
- Dynamic Adaptive Jitter Buffer
- DTMF: In-band, Out-of-Band (RFC2833/ SIP INFO)
- VQM voice quality monitoring

Video

- Video decoding: H.264
- Video call resolution: QVGA/CIF/VGA/4CIF/720p/1080p

Network

- Physical: 10/100/1000 Mbps Ethernet, dual bridged port for PC bypass
- IP Mode: IPv4/IPv6/IPv4&IPv6
- IP Configuration: Static IP / DHCP / PPPoE
- Network Access Control: 802.1x
- VPN: OpenVPN/L2TP
- VLAN
- LLDP
- CDP
- QoS
- RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- WI-FI:WI-FI Security Mode: WPA /WPA2-PSK/802.X EAP

Protocols

- SIP2.0 over UDP/TCP/TLS
- RTP/RTCP/SRTP
- STUN
- DHCP
- CDP
- LLDP

- PPPoE
- 802.1x
- 802.11ax
- OpenVPN
- SNTP
- FTP/TFTP
- HTTP/HTTPS
- TR-069
- AES128 & AES256

Deployment & Management

- Auto-Provisioning via FTP/TFTP/HTTP/HTTPS/DHCP OPT66/SIP PNP/TR-069
- Web Management Portal
- Web-based Packet Dump
- Configuration Export / Import
- Phonebook Import/Export
- Firmware Upgrade
- Syslog

Physical Specifications

- LCD: 7-inch (1024x600) color screen, IPS
- Keypad: 27 keys, including
 - 5 Function keys (Contact, MWI, Mute, Headset, Redial)
 - 4 Navigation keys
 - 1 OK key
 - 1 Return key
 - 12 Standard Phone Digits keys
 - 2 Volume Control keys, Up/Down
 - 1 Hands-free key
- HD Handset (RJ9) x1
- Standard RJ9 Handset Cord x1
- 1.5M CAT5.E Ethernet Cable x1
- Desk Stand x1
- Status Indicator Light x1 (Red)
- RJ9 Port x2: Handset x1, Headset x1
- RJ45 Port x2: Network x1, PC x1 (Bridged to Network)
- Security lock port x1
- Power: DC12V/1.5A or PoE
- Power dissipation: standby 1.9W, high: 8.9W (Power supply)
- Power dissipation: standby 1.9W, high: 12.1W (POE)
- Working Temperature: 0~45°C
- Working Humidity: 10~95%
- Installation:
 - Desktop Stand
 - Wall-mounted (Optional)
- Color: Gunmetal
- Qty/CTN: 10PCS
- N.W/CTN: 15.9kg
- G.W/CTN: 17.0kg
- Device Dimensions:245.4x252.5x63mm
- Gift Box Dimensions: 357x258x71 mm
- Outer CTN Dimensions: 534x380x377 mm (10 PCS)

The above specifications may be updated in the future without prior notice. All hardware/software/physical features should be based on the final shipped products.

For more information, please visit: www.fanvil.com

www.fanvil.com

Add: 10F, Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao' An District, Shenzhen, China

Tel: +86-755-2640-2199 Fax: +86-755-2640-2618 Email: sales@fanvil.com

